

# Eco Architectural- Eco Ø330mm


## General Information

Energy Saving up to 50%, even lighting output. Low voltage- DC 24V. Instant start, no flickering no humming. New high efficacy constant voltage driver. Special circuit design, each group of LEDs work separately avoiding any problem of light output caused by single faulty LED. No RF interference.



## Technical Information

- Power Supply: 24V
- Power Consumption: 22W
- Average Lifespan: 50,000h
- Color: W, WW
- Color Temperature: 2500K-4000K (WW), 4000K-7000K (W)
- Lumen: 1500lm (WW), 1650lm (W), 1700lm (CW)
- Working Temperature: -20°C- 50°C, storage temperature: -30°C- 60°C
- IP: IP20
- Certificates: CE, RoHS
- Dimension: Ø330x26mm
- Punch Dimension: Ø320mm

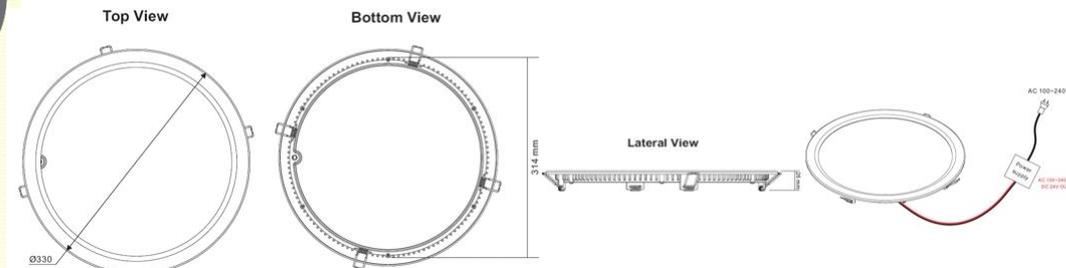

**eco** Architectural

