


# OZ & ALICE

## FOLLOWSPOTS

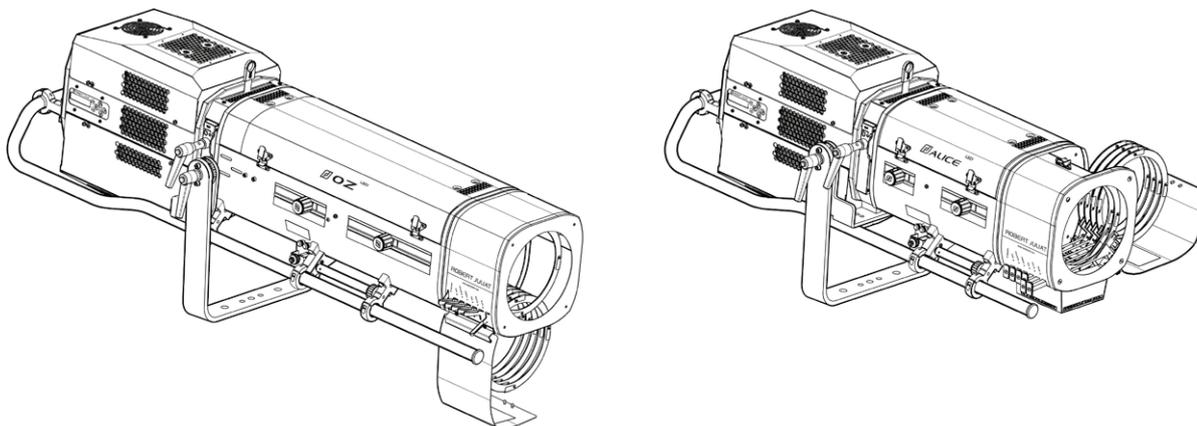

Model	Standard	North American
7 - 14,5°	OZ 1169	OZ 1169C
13 - 24°	ALICE 1469	ALICE 1469C

## 600W LED FOLLOWSPOTS

User's manual:	Technical file:
	
For more information and updates: <a href="http://www.robertjuliat.com/followspots/followspots.html">www.robertjuliat.com/followspots/followspots.html</a>	

Included:		
CAL03 OR CAL04	DN41145300-A	PF1011
		
		
SGUP	VDM100	CCU1

Oz - 1169 v1a / Alice - 1469 v1a

VALIDATION: 28/09/18

**DN41145300-B**

Robert Juliat S.A.S. 32, rue de Beaumont, F 60530 Fresnoy-en-Thelle - phone : +33 (0)3 44 26 51 89 - fax : +33 (0)3 44 26 90 79 - info@robertjuliat.fr

[www.robertjuliat.com](http://www.robertjuliat.com)



**ROBERT JULIAT**

# 1 User's instructions

## GENERAL INSTRUCTIONS

1. Not for residential use.
2. **These fixtures must only be serviced by a qualified technician.**
3. In addition to the instructions indicated on this page, relevant health and safety requirements of the appropriate EU Directives must be adhered to at all times.
4. This fixture is in compliance with section 17 - Lighting appliance for theatre stages, television, cinema and photograph studios. Standards NF EN 60598-1, NF EN 60598-2-17, Low Voltage Directive 2014/35/UE & EMC Directive 2014/30/UE.
5. This fixture is rated as IP20, and is for indoor use only.

## FIXTURE

6. Ensure fixture is correctly mounted on an appropriate support.
7. Protection screens and lenses must be replaced in the event of any damage, such as cracks or deep scratches, since these might reduce performance.
8. When hung or flown the fixture must be secured by an additional hanging accessory (such as a safety cable or bond) of suitable length.
9. Safety bonds or cables must be securely attached to the back of the fixture and be as short as possible, or rolled up as necessary, to minimise travel distance should the fixture be dislodged.
10. Movable accessories (scroller, etc.) must also be secured with a suitable safety cable or bond at the front of the fixture.
11. The combined weight of both the fixture and the accessories must be considered when choosing the load-bearing capability of safety cable or bond.
12. Do not open lighting fixture when the source is on.
13. **WARNING:** LED source become hot during use. Allow fixture to cool before servicing.
14. Do not tamper with design of fixture nor any of its safety features.
15. Tighten electrical mains cable connections regularly and replace with one of identical specification if damaged.
16. Use only with correct power supply.

## VENTILATION

17. Keep well away from flammable material.
18. Not for outdoor use. Do not cover. Do not permit fixture to get wet.
19. To avoid overheating, do not obstruct air vents.
20. Ensure any cooling fans are in correct working order. If fans are not working, turn fixture off immediately and service as necessary.

## CLEANING

21. Do not touch LED source with fingers.
22. Clean all optical parts with alcohol-based cleaner.
23. Clean all filters regularly.



## POWER SUPPLY

24. Disconnect from the mains before servicing.
25. Mains connection only. Do not connect to "electronic output" such as dimmer.
26. Not for outdoor use. Do not cover.
27. Ensure power supply circuit breakers, always remain accessible.

## PLEASE NOTE

These products have been built to conform to European standards relating to professional lighting equipment. Any modification made to our products will void the manufacturers' warranty.

Risk group 2	
	<b>CAUTION:</b> Possibly hazardous optical radiation emitted from this product. Do not stare at operating lamp. Maybe harmful to the eye.

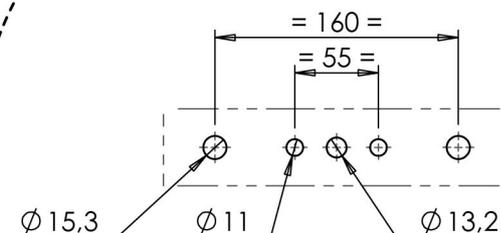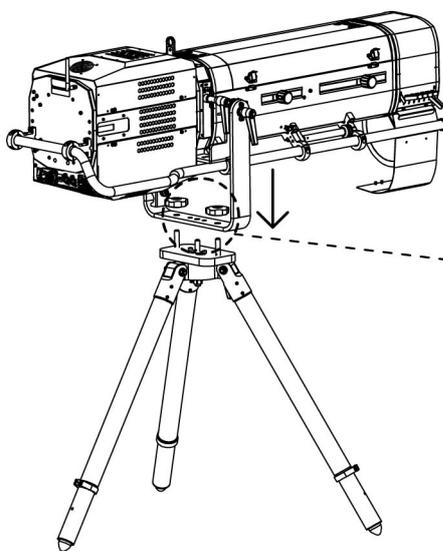


Dimensions in mm.

• GT4000 / S


*Please refer to the relevant user manual for further details.*

### 3 Functions

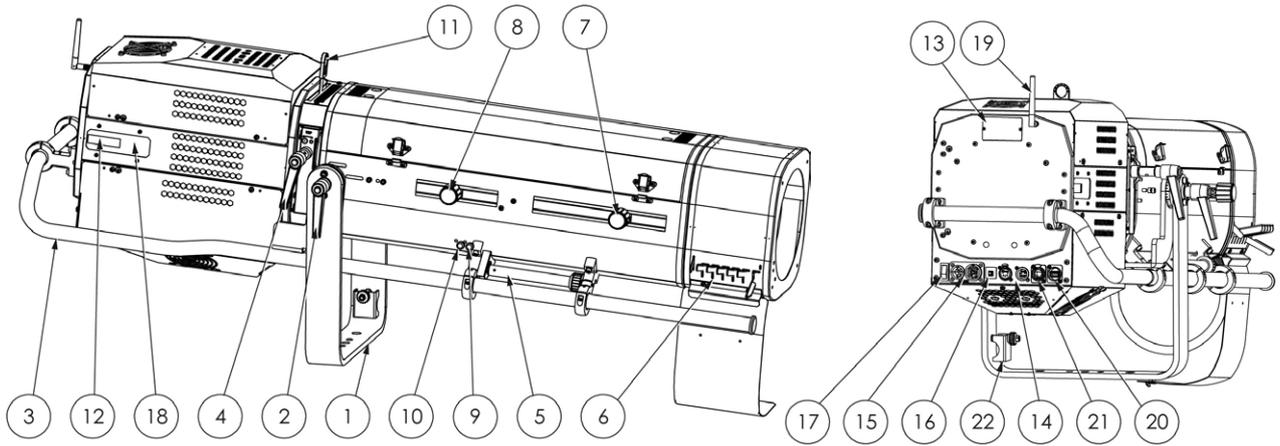


Functions	
1. Yoke	12. Local display
2. Yoke locking	13. Identification plate
3. Side operating	14. Data connectors (OUT and IN)
4. Iris control	15. Power connectors (IN and OUT)
5. Dimming control	16. Thermal breaker
6. Colour changer	17. Power switch
7. Focus adjustment	18. Control board
8. Zoom adjustment	19. Wireless DMX antenna (option)
9. Frost glass	20. USB connector
10. Spare filter	21. RJ45 connector
11. Gobo holder	22. Cable lock

### 4 Electrical / Data connections

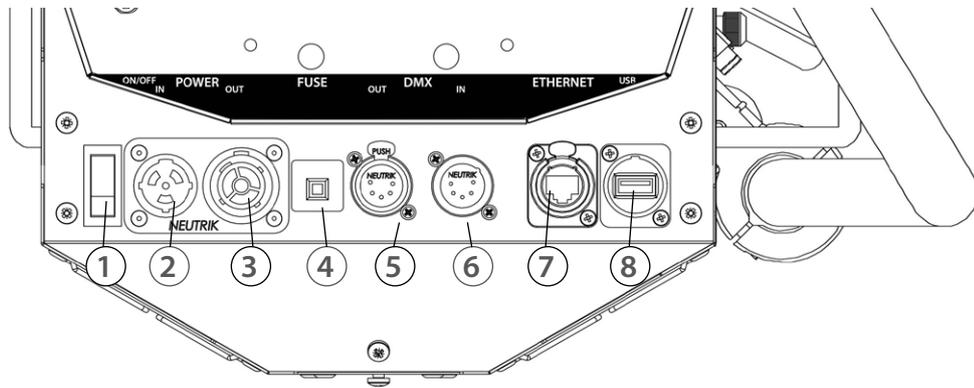

1	Switch	Power ON / OFF
2	Power input	Connector: Neutrik® powerCON TRUE1 Max. 16A.
3	Power output	Connector: Neutrik® powerCON TRUE1 Max. 8A.
4	Fuse	Thermal breaker: 10A. automatic switch
5	Data Out	Connector: XLR 5-pin
6	Data In	Connector: XLR 5-pin / Protocol: USITT DMX 512-A RDM
7	Ethernet	Connector: RJ45 / Protocol Art-Net, sACN + software updating
8	Auxiliary out	Connector: USB (Not for charging purpose)

## 4 Operation

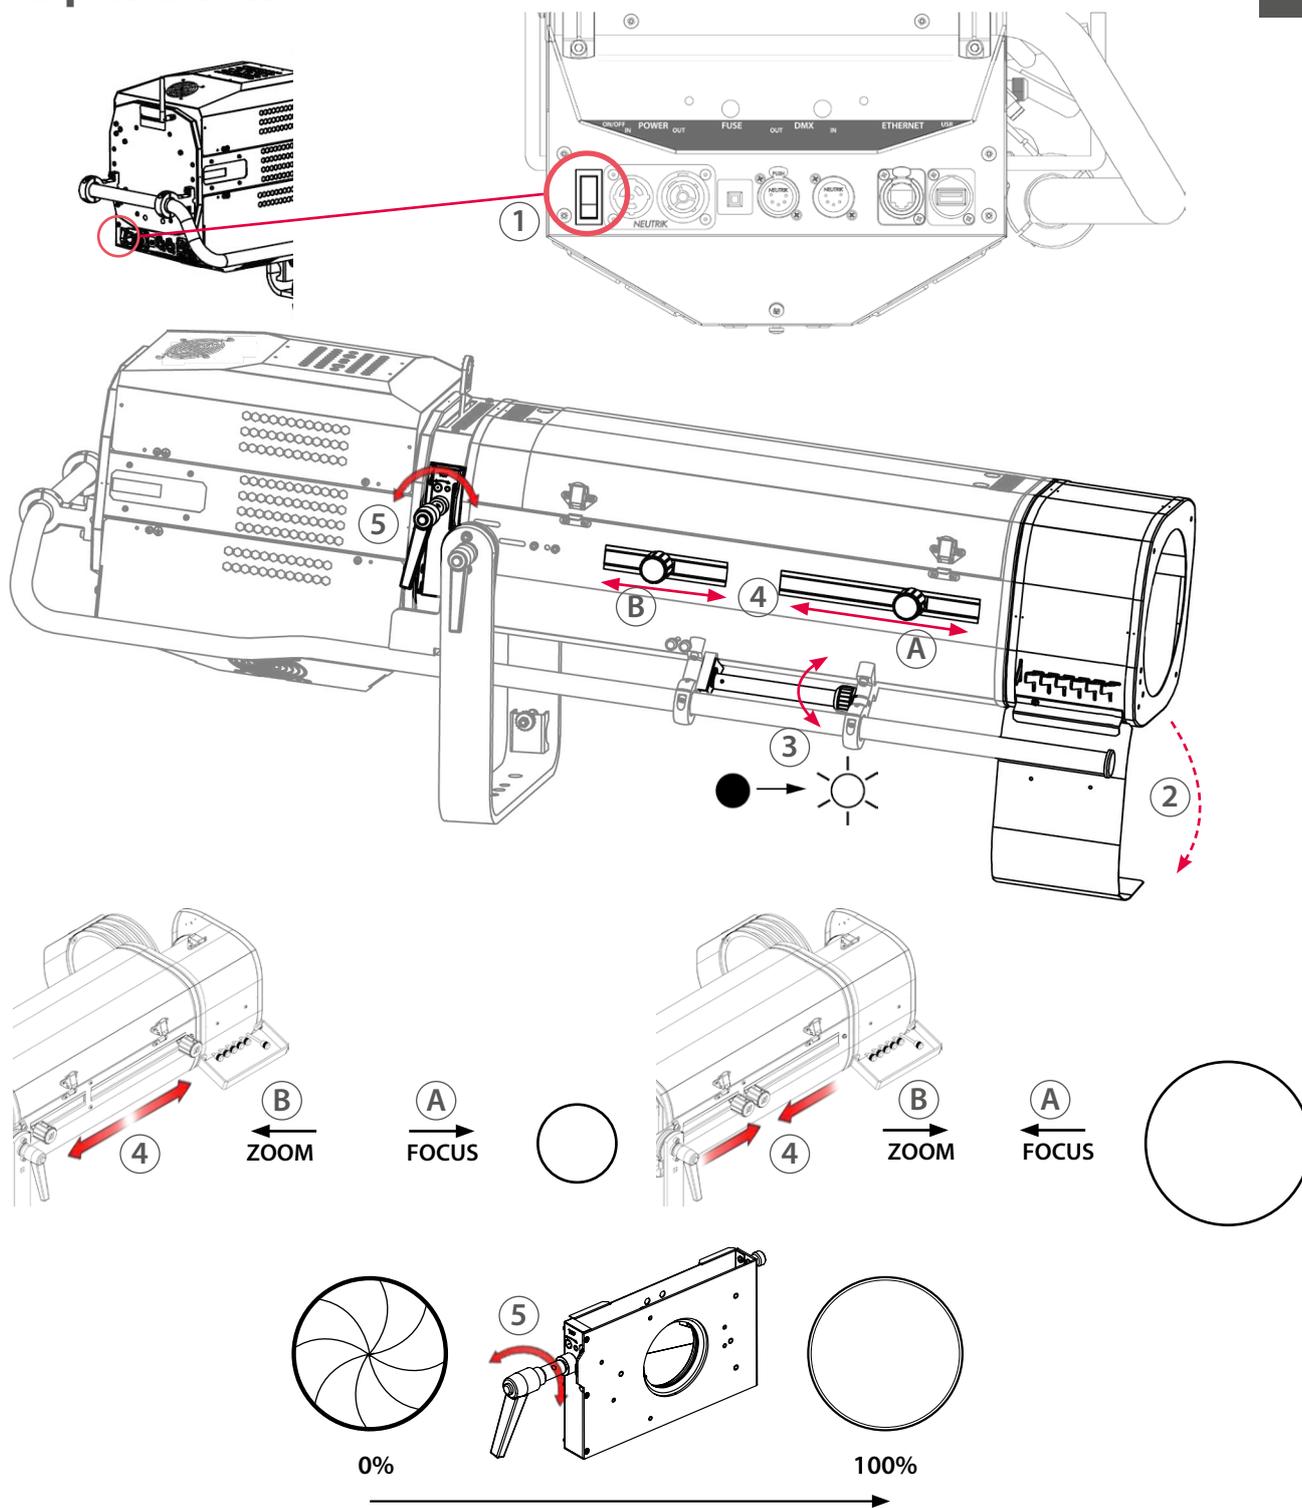

- ① Switch on the followspot by pressing the ON / OFF power button.
- ② Open the colour changer unit to let the light beam out.
- ③ Use the manual dimming control to adjust the light intensity.
- ④ The light beam zoom and focus can be set by using the control knobs A & B.
- ⑤ The beam size can be adjusted by using the iris cassette.

### PLEASE NOTE

This product has been built in conformity with the European Standards in relation to professional lighting equipment. Any modification made to our product will void the manufacturers' warranty.

Robert Juliat reserves the right to change or alter any of the items detailed on this page, to increase or improve manufacturing techniques without prior notice.